

**Image Acquisition + Histograms**

- Image Characteristics
- Image Acquisition
- Image Digitization
  - Sampling
  - Quantization
- Histograms
- Histogram Equalization

---

---

---

---

---

---

---

---

---

---

### What is an Image ?

- An image is a projection of a 3D scene into a 2D *projection plane*.



- An image can be defined as a 2 variable function  $I(x,y)$ , where for each position  $(x,y)$  in the projection plane,  $I(x,y)$  defines the light intensity at this point.

---

---

---

---

---


---

---

---

---

---

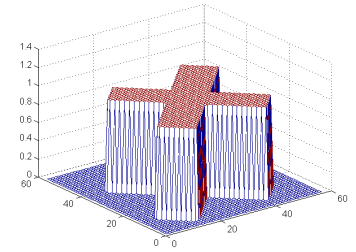

---

---

---

---

---

---

---

---

---

---

• Three types of images:

– Binary images


$$I(x,y) \in \{0, 1\}$$

– Gray-scale images

$$I(x,y) \in [a, b]$$

– Color Images

$$I_R(x,y) \quad I_G(x,y) \quad I_B(x,y)$$

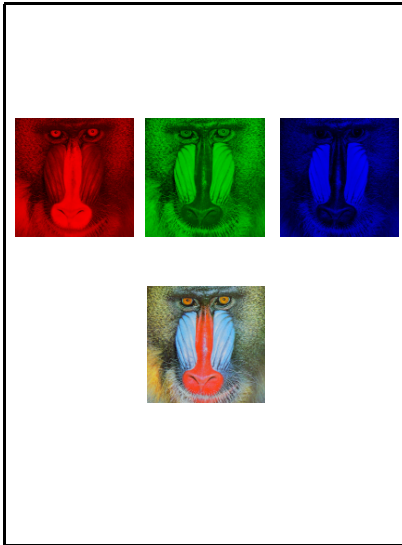

## Image Values

- **Image Intensity** -
  - Light energy emitted from a unit area in the image.
  - Device dependence.
- **Image Brightness** -
  - The subjective appearance of a unit area in the image.
  - Context dependence.
  - Subjective.
- **Image Gray-Level** -
  - The relative intensity at each unit area.
  - Between the lowest intensity (Black value) and the highest intensity (White value).
  - Typical: In the range of [0,1] or [0,255]

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---



---

---

## Image Average (Brightness)

- Image average:

$$I_{av} = \frac{\int_y^x \int_x^y I(x, y) dx dy}{\int_y^x \int_x^y dx dy}$$




---

---

---

---

---

---

---

---

---

---



---

---

---

---

---

---

---

---

---

---

## Image Contrast

- The **contrast** at an image point denotes the (relative) difference between the intensity of the point and the intensity of its neighborhood:

$$C = \left| \frac{I_p - I_n}{I_n} \right|$$



$$c = \left| \frac{0.1 - 0.1}{0.1} \right| = 0 \quad c = \left| \frac{0.7 - 0.3}{0.3} \right| = 0.4$$




---

---

---

---

---

---

---

---

---

---

- The contrast definition of the entire image is ambiguous.
- In general it is said that the image contrast is high if the image gray-levels fill the entire range.



Low contrast



High contrast

---

---

---

---

---

---



---

---

---

---

- Contrast manipulation of the entire image can be done by *stretching* and *shifting* the image gray-levels



$$I_{\text{NEW}}(x,y) = a * (I(x,y) - b) + c$$

---

---

---

---

---

---

---




---

---

---

## The Image Histogram

- **Image Histogram** describes the relative proportion of gray-level  $I$  in the image plane:




---

---

---

---

---

---





---

---

---

---

### Histograms - Examples




---

---

---

---

---


---

---


---

---


---



- Decreasing the image contrast:



- Increasing the new image average :




---

---

---

---

---

---


---

---

---

---

### Image Acquisition

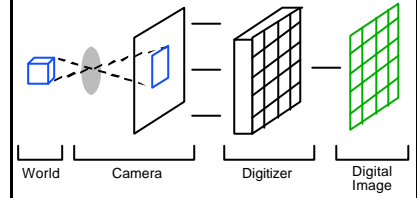

0	10	10	15	50	70	80
0	0	100	120	125	130	130
0	35	100	150	150	80	50
0	15	70	100	10	20	20
0	15	70	0	0	0	15
5	15	50	120	110	130	110
5	10	20	50	50	20	250

PIXEL  
(picture element)

Typically:  
0 = black  
255 = white

---

---

---

---

---


---

---

---

---

---

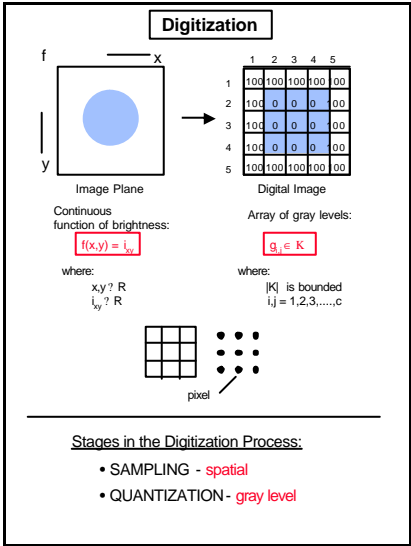


---

---

---

---

---


---

---

---

---

---

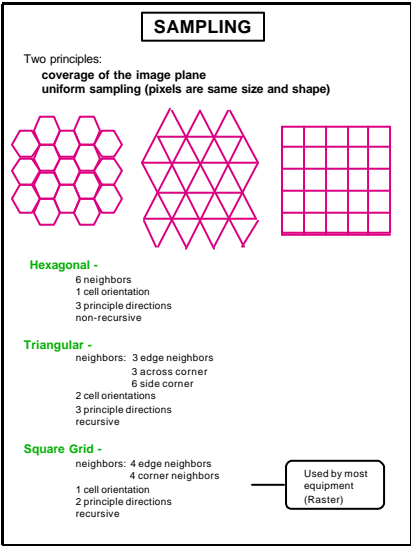


---

---

---

---

---


---

---

---

---

---

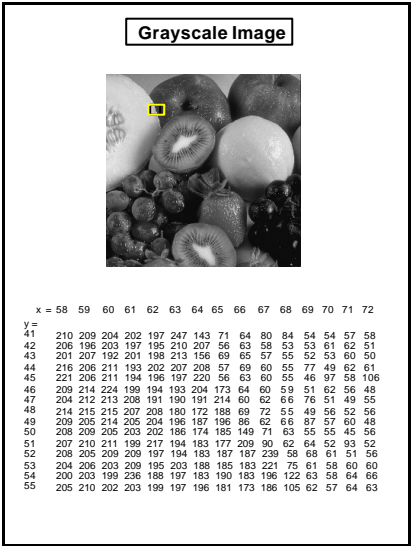


---

---

---

---

---

---


---

---

---

---

Using Different Number of Samples

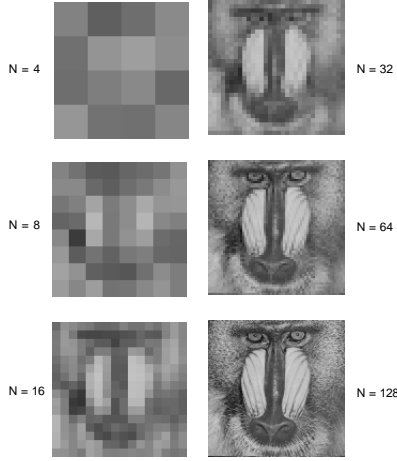

N = 4

N = 32

N = 8

N = 64

N = 16

N = 128

---

---

---

---

---

---

---


---

Image Resolution

- The density of the sampling denotes the separation capability of the resulting image.
- **Image resolution** defines the finest details that are still visible by the image.
- We use a cyclic pattern to test the separation capability of an image.

$$\text{frequency} = \frac{\text{number of cycles}}{\text{unit length}}$$

$$\text{wavelength} = \frac{\text{unit length}}{\text{number of cycles}} = \frac{1}{\text{frequency}}$$




---

---

---

---


---

---

---

---

Nyquist Frequency




---

---

---

---


---

---

---

---

### Nyquist Frequency



---

---

---

---

---

---

---

---


---

---

### Sampling Density

- **Nyquist Rule:** Given a sampling at intervals equal to  $d$  then one may recover cyclic patterns of wavelength  $> 2d$ . (Shannon-Whittaker-Kotelnikov theorem).
- **Aliasing:** If the pattern wavelength is **less** than  $2d$  erroneous patterns may be produced.

1D Example:



- To observe details at frequency  $f$  one must sample at frequency  $> 2f$ .
- The Frequency  $2f$  is the **NYQUIST frequency**.

---

---

---

---

---

---


---

---

---

---

### Temporal Aliasing



---

---

---

---

---

---

---


---

---


---



### Non Uniform Sampling




### Quantization



Continuous Intensity Range      Discrete Gray Levels

- Choose number of gray levels (according to number of assigned bits).
- Divide continuous range of intensity values.

### Different Number of Gray Levels

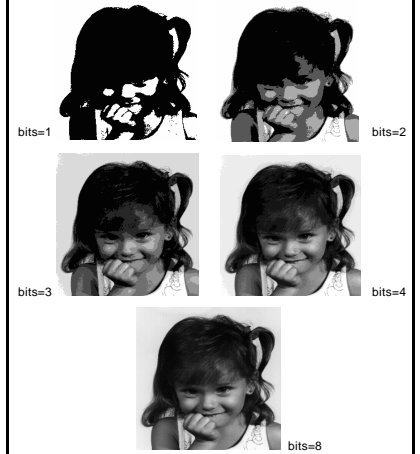

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---


---

---

---

---

---

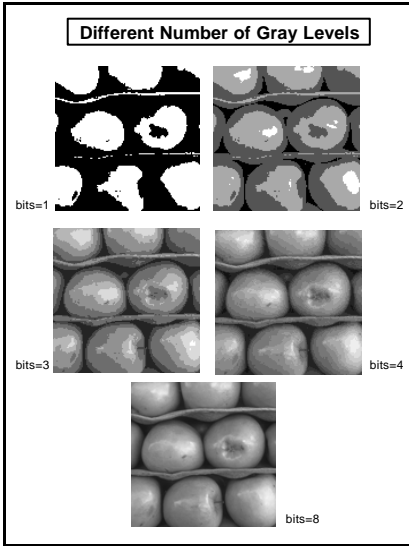


---

---

---

---

---


---

---

---

---

---

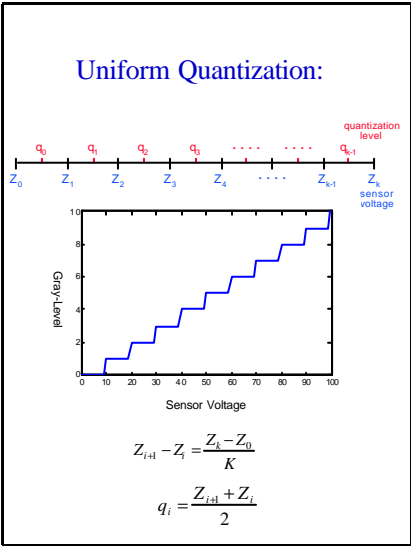


---

---

---

---

---


---

---

---

---

---

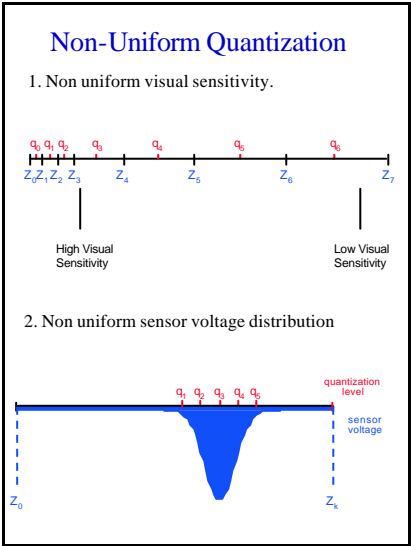


---

---

---

---

---

---


---

---

---

---

## Optimal Quantization

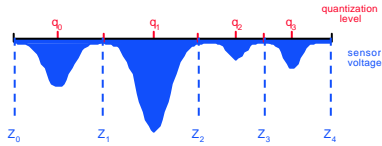

Minimizing the quantization error:


$$\sum_{i=0}^{k-1} \int_{Z_i}^{Z_{i+1}} (q_i - Z)^2 P(Z) dz$$

where  $P(Z)$  is the distribution of sensor voltage.

Solution: 
$$q_i = \frac{\int_{Z_i}^{Z_{i+1}} Z P(Z) dz}{\int_{Z_i}^{Z_{i+1}} P(Z) dz}$$
 (weighted average in the range  $[Z_i \dots Z_{i+1}]$ )

$$Z_i = (q_{i-1} + q_i) / 2$$

## Discrete Histogram

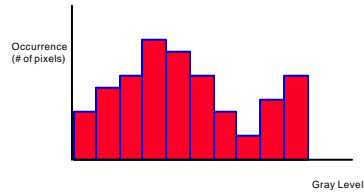

$$H(k) = \text{\#pixels with gray -level } k$$


Normalized histogram:

$$H_{\text{norm}}(k) = H(k) / N$$

where  $N$  is the total number of pixels in the image.

## Gray Level Separation:

Visual discrimination between objects depends on their gray-level separation. Can we improve discrimination AFTER image has been quantized?

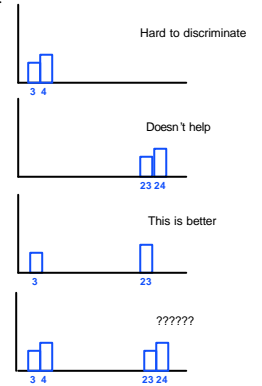


---

---

---

---

---

---

---

---

---

---



---

---

---

---

---

---

---

---

---

---



---

---

---

---

---

---

---

---

---

---

## Histogram Equalization


- For a better visual discrimination we would like to re-assign gray-levels with maximal uniformity.
- Define a gray-level transformation

$$\hat{g} = T(g)$$


such that:

- The histogram according to  $\hat{g}$  is as flat as possible.
- The order of Gray-levels is maintained.
- The histogram bars are not fragmented.
- For example:

$$T(g) = \frac{H(0) + H(1) + \dots + H(g)}{N} \cdot 255$$

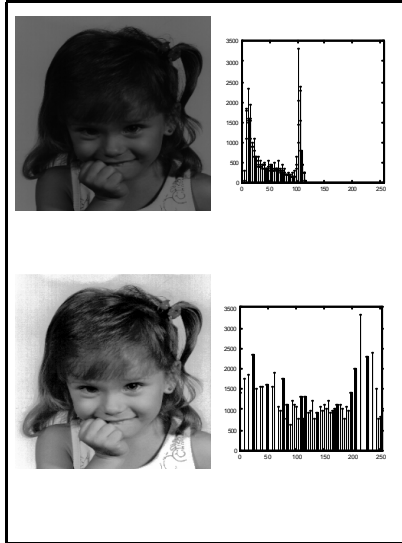

## Histogram Equalization - Example

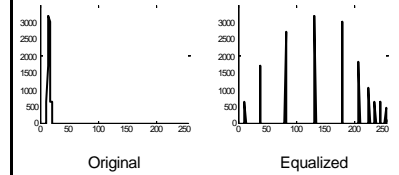


---



---



---



---



---



---



---



---



---



---



---



---



---



---



---



---



---



---



---



---



---



---



---



---



---



---



---



---



---



---

## Example Questions

1. Given an image  $I(x,y) \in [0,1]$  .

How can we obtain the maximum contrast image using a linear gray-level transformation:

$$I_{\text{NEW}}(x,y) = a I(x,y) + b$$

- Find **a** and **b**.
- Given the histogram of  $I$ , describe, the histogram of  $I_{\text{NEW}}$ .
- Hints:
  - Use the values  $\text{MAX}(I)$  and  $\text{MIN}(I)$  which are the maximal and minimal gray-level values in the image.
  - The new gray-level values should be kept in the range  $[0,1]$ .

2. Given the histogram  $H(I)$  what is the average of the image  $I$  ?

3. In the following cyclic pattern the frequency in the X direction is 20 cycles/length.



- What is the wavelength of this pattern in the X direction?
- What is the frequency and wavelength of this pattern in the Y direction?
- What is the frequency and wavelength (for X and Y) of this pattern after rotating it by 30 degrees clockwise?



---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---